

Adjustment Procedure

Projection Screen Tab-Tensioning System by Draper

Draper's Tab-Tensioning System is factory-set, and under normal circumstances will not require field adjustment. If, however, you notice wrinkles, waves, or other indications that the tensioning cables need adjusted, follow the procedure below.

- ① Determine which side requires adjustment.
 - ② Secure dowel with one hand.
- Caution: Do not touch or bend surface.**
- ③ Using Phillips-head screwdriver, depress spring-loaded adjustment screw (see Fig. 1) and slowly turn clockwise to tighten tension, or counterclockwise to loosen tension. The screw adjusts in $\frac{1}{4}$ turn increments. Adjust only **one increment** ($\frac{1}{4}$ turn).
 - ④ If problem is not corrected, leave screen in position for 24 hours to allow surface material to stretch into position.
 - ⑤ If problem still is not corrected, repeat steps 2 and 3.

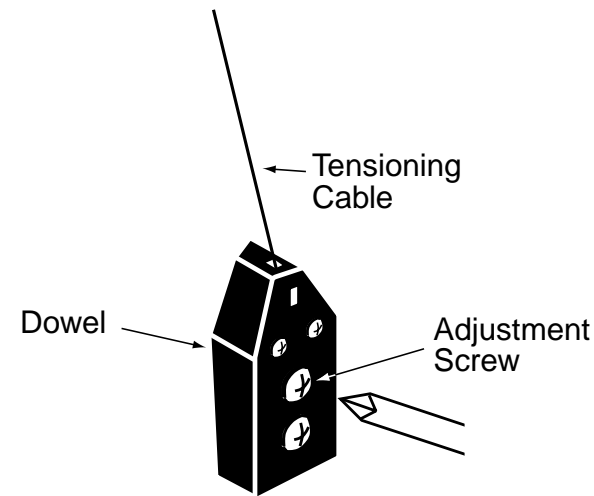


Figure 1

DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999 ■ fax 765-987-7142
e-mail draper@draperinc.com ■ www.draperinc.com

Copyright © 2001 Draper, Inc.

Form TabI01-A

Printed in U.S.A.

If you encounter any difficulty adjusting your Tab-Tensioning System, call your dealer or Draper, Inc., Spiceland, Indiana, (765) 987-7999, Fax (765) 987-7142, or e-mail draper@draperinc.com.